


## APPLICATION:

Fits 1/4" stem diameter, bimetal thermometers.  
Standard thermowell is stepped to 1/2" OD except 2-1/2" insertion. Please specify if straight shank is required.

## MODEL 2SS

Without lagging extension for 1/4" diameter stem

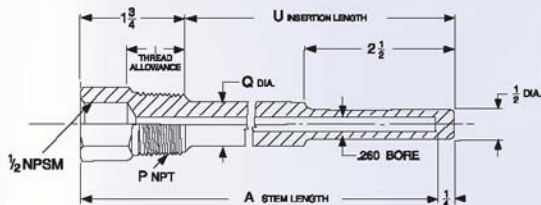


### 3/4 NPT - CATALOG NUMBERS

A	U	Q	BRASS	304SS	316SS
4	2 1/2	-	2SS413	2SS443	2SS463
6	4 1/2	3/4	2SS613	2SS643	2SS663
9	7 1/2	3/4	2SS913	2SS943	2SS963
12	10 1/2	3/4	2SS1213	2SS1243	2SS1263

## MODEL 2SL

With lagging extension for 1/4" diameter stem

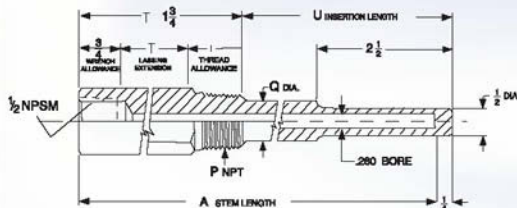

### 3/4 NPT - CATALOG NUMBERS

A	U	T	Q	BRASS	304SS	316SS
6	2 1/2	2	-	2SL613	2SL643	2SL663
9	4 1/2	3	3/4	2SL913	2SL943	2SL963
12	7 1/2	3	3/4	2SL1213	2SL1243	2SL1263

## PROCESS CONNECTION SIZE:


3/4" is standard. Other thread sizes available upon request.

## MATERIALS

Brass, 304SS, 316SS. Other materials available upon request.

## MODEL 2LS

Limited space thermowell for 2 1/2" stem.

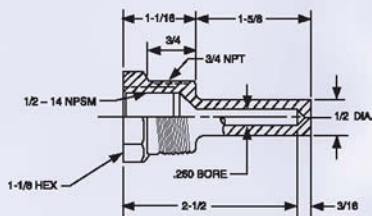

### 3/4 NPT - CATALOG NUMBERS

3/4 NPT	BRASS	304SS	316SS
	2LS213	2LS243	2LS263

Brass wells are not recommended for installations involving high pressures and/or temperatures over 400°F.

## CAP & CHAIN:

Available upon request for keeping thermowell bore clean when not in use. (Not shown)